


Transparent noise protection system type T16/16.1

with aluminium frame, reflective

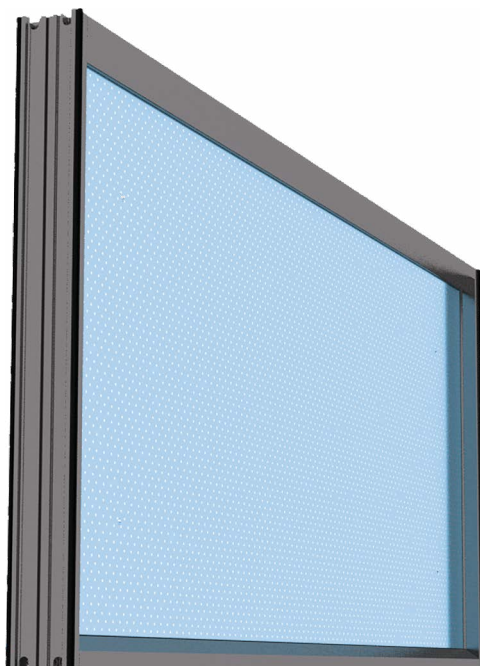

Airborne sound insulation

DIN EN ISO 140-3: R_w **33.0 dB**


DIN EN 1793-2: DL_R **31.0 dB**

DIN EN 1793-6: DL_{SI} **39.0 dB**

TECHNICAL DATA

L =	m =	m =
(h = 1000 mm)	(t = 15 mm)	(t = 20 mm)
Standard lengths		
1.95	44.93	56.03
2.45	55.75	69.76
2.95	66.58	83.48
3.95	88.23	110.92
4.95	109.88	138.37
$\varnothing \approx$	24.36 (kg/m²)	29.96 (kg/m²)

Special lengths / heights possible

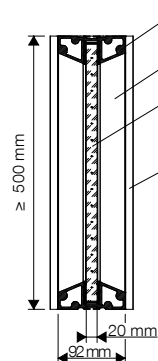

Design and dimensioning according to ZTV-LSW 22
Standard installation in posts of the HE_Series 120

- 1 Horizontal profile
- 2 Vertical profile
- 3 Acrylic glass plate (transparent)
- 4 EPDM seal